


sysron TOOLS - seaming wheels

MADE FOR PERFORMANCE

FOR ALL
SYSTRON ESX
MACHINE-
SERIES

*Maximum feed speed and highest arris
and edge quality*

- + Highest feed speeds:
 - + up to 30 m/min on seams and arrises
 - + up to 15 m/min when grinding
- + Float glass from 4 to 19 mm and laminated glass from 6 to 20 mm
- + Highest lifetime thanks to optimised layer design and newly developed specifications combined with diamond heights up to 7 mm
- + Optimised lifetime thanks to repeated reprofilings
- + Available as trapezoidal or V-shaped wheels
- + Example 1 (standard): Tool package with 4 trapezoidal wheels for glass thicknesses from 4 to 12 mm
- + Example 2: Grinding with V-tools for glass thicknesses from 4 to 19 mm

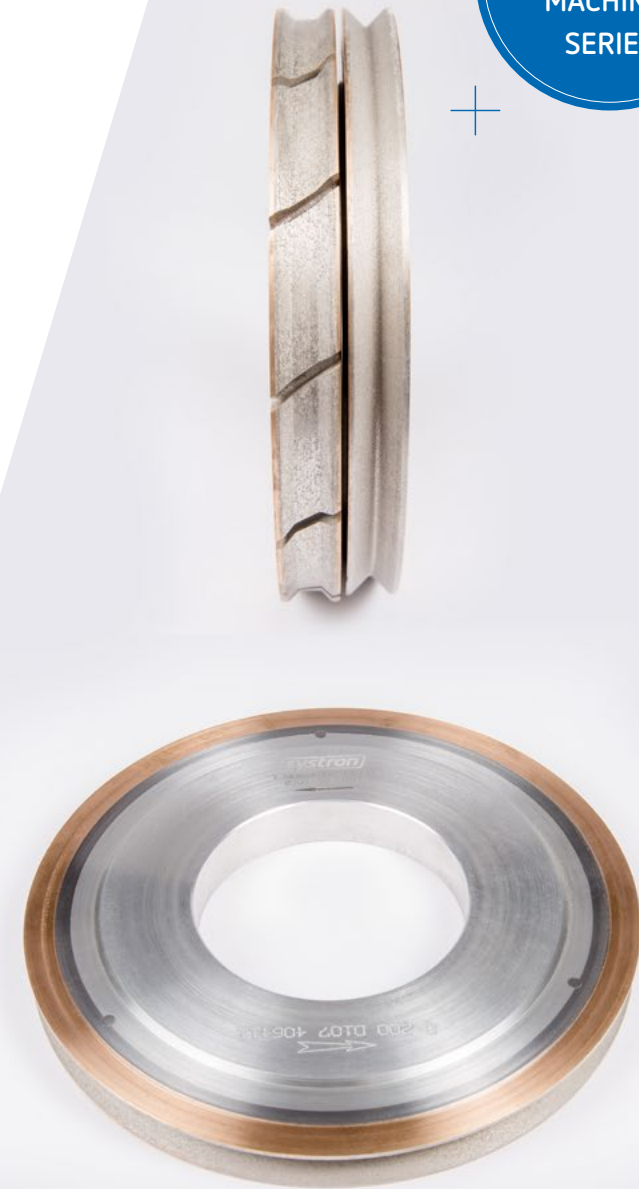

Processing at a new level!

sys tron *TOOLS* - seaming wheels

MADE FOR PERFORMANCE

Parameter recommendations

SEAMING

glass thickness mm	speed m/min	rpm min ⁻¹
4 - 8	25 - 30	2400
10 - 12	20 - 22	2400
15 - 19	12 - 15	2400

GRINDING

glass thickness mm	removal approx. mm	speed m/min	rpm min ⁻¹
4 - 8	0,50	10 - 17	2400
10 - 12	0,50	6 - 9	2400
15 - 19	0,50	3 - 5	2400



sys tron
GLASS TECHNOLOGIES

sys tron GmbH . Pfarrwald 47 . 3354 Wolfsbach . Austria
+43 7477 44152 . office@sys tron.at . www.sys tron.at